

CAYMAN FLOORING SPECIFICATIONS

PRODUCT INFORMATION

CONSTRUCTION	Engineered Rigid Core Stone-Polymer Composite (SPC) / 28mil (0.7mm) Wear Layer
PLANK DIMENSIONS	4mm + 1mm IXPE Attached Pad Thickness x 9" Width x 73" Length
MILLING	4 sided Painted-Bevel Edge / Uniclic® Locking System
FINISH	10% sheen / EIR Texture / Aluminer+™
COLOR VARIANCE	Medium / High
INSTALLATION	Float or Glue. Radiant floor heating compatible. Above, on, or below grade.
ENVIRONMENTAL	FloorScore® Certified / 100% Virgin PVC
WATER PERFORMANCE	100% waterproof and safe to install in full bathrooms, laundry rooms, and mudrooms.

PACKAGING

BOX WEIGHT: 49 LBS	SQFT PER BOX: 27.48	BOX DIMENSIONS: 73.5" x 9.63" x 1.38"
PLANKS PER BOX: 6	PACK SIZE: 56 Boxes/Pallet	PALLET DIMENSIONS: 76" x 41.25" x 25"

WARRANTY



FINISH	Lifetime Residential / 25-Year Light Commercial
STRUCTURE	Lifetime Structural Warranty

RESOURCES


Download the latest versions of our installation and maintenance guides, as well as watch installation videos, at www.bhwfloors.com

ALUMINER+™

Our signature Aluminer+™ finish is a proprietary combination of aluminum oxide and silicone carbide making this the most durable finish available. We stand behind our finish by offering a Lifetime Residential wear through warranty.

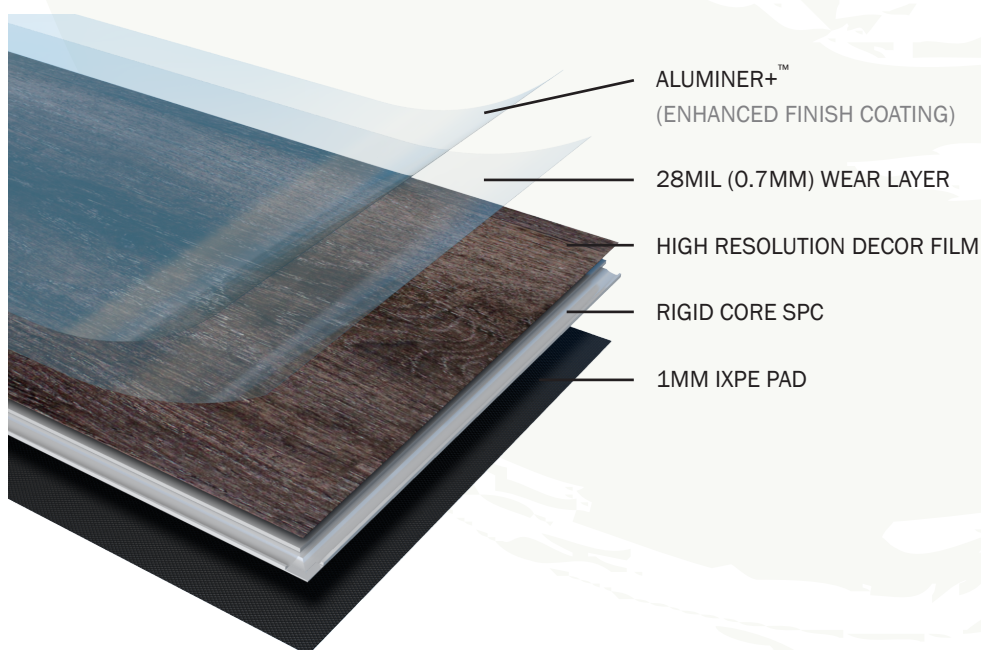


COLLIERS 55800




PAPPAGALLO 55801




PALM HEIGHTS 55802




COBALT COAST 55803




COMPASS POINT 55804



WEST BAY 55805



GEORGE TOWN 55806



SMITH COVE 55807